




Problem F

Posterize

Time limit: 2 seconds

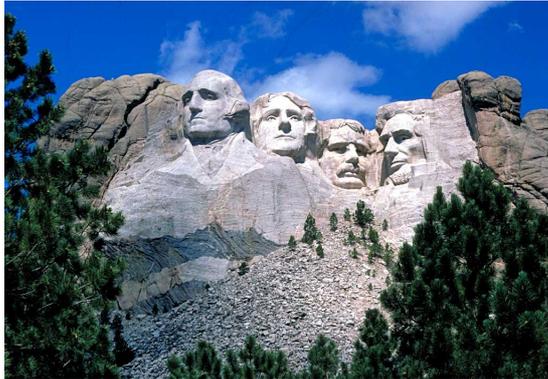

Pixels in a digital picture can be represented with three integers in the range 0 to 255 that indicate the intensity of the red, green, and blue colors. To compress an image or to create an artistic effect, many photo-editing tools include a “posterize” operation which works as follows. Each color channel is examined separately; this problem focuses only on the red channel. Rather than allow all integers from 0 to 255 for the red channel, a posterized image allows at most k integers from this range. Each pixel’s original red intensity is replaced with the nearest of the allowed integers. The photo-editing tool selects a set of k integers that minimizes the *sum of the squared errors* introduced across all pixels in the original image. If there are n pixels that have original red values r_1, \dots, r_n , and k allowed integers v_1, \dots, v_k , the sum of squared errors is defined as

$$\sum_{i=1}^n \min_{1 \leq j \leq k} (r_i - v_j)^2.$$

Your task is to compute the minimum achievable sum of squared errors, given parameter k and a description of the red intensities of an image’s pixels.

Input

The first line of the input contains two integers d ($1 \leq d \leq 256$), the number of distinct red values that occur in the original image, and k ($1 \leq k \leq d$), the number of distinct red values allowed in the posterized image. The remaining d lines indicate the number of pixels of the image having various red values. Each such line contains two integers r ($0 \leq r \leq 255$) and p ($1 \leq p \leq 2^{26}$), where r is a red intensity value and p is the number of pixels having red intensity r . Those d lines are given in increasing order of red value.

Output

Display the sum of the squared errors for an optimally chosen set of k allowed integer values.



Sample Input 1

```
2 1
50 20000
150 10000
```

Sample Output 1

```
66670000
```

Sample Input 2

```
2 2
50 20000
150 10000
```

Sample Output 2

```
0
```

Sample Input 3

```
4 2
0 30000
25 30000
50 30000
255 30000
```

Sample Output 3

```
37500000
```