

String Processing

(Based on [Manber 1989])

Yih-Kuen Tsay

Department of Information Management
National Taiwan University

Data Compression

Problem

Given a text (a sequence of characters), find an encoding for the characters that satisfies the prefix constraint and that minimizes the total number of bits needed to encode the text.

The *prefix constraint* states that the prefixes of an encoding of one character must not be equal to a complete encoding of another character.

Denote the characters by c_1, c_2, \dots, c_n and their frequencies by f_1, f_2, \dots, f_n . Given an encoding E in which a bit string s_i represents c_i , the length (number of bits) of the text encoded by using E is

$$\sum_{i=1}^n |s_i| \cdot f_i.$$

A Code Tree

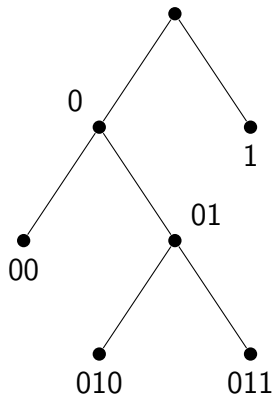


Figure: The tree representation of encoding.

Source: redrawn from [Manber 1989, Figure 6.17].

A Huffman Tree

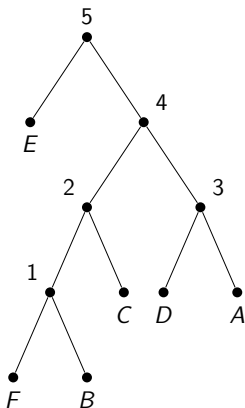


Figure: The Huffman tree for a text with frequencies of A: 5, B: 2, C: 3, D: 4, E: 10, F:1.

Source: redrawn from [Manber 1989, Figure 6.19].

Huffman Encoding

Algorithm Huffman_Encoding (S, f);

insert all characters into a heap H

according to their frequencies;

while H not empty **do**

if H contains only one character X **then**

make X the root of T

else

delete X and Y with lowest frequencies;

from H ;

create Z with a frequency equal to the

sum of the frequencies of X and Y ;

insert Z into H ;

make X and Y children of Z in T

Huffman Encoding

Algorithm Huffman_Encoding (S, f);

insert all characters into a heap H

according to their frequencies;

while H not empty **do**

if H contains only one character X **then**

make X the root of T

else

delete X and Y with lowest frequencies;

from H ;

create Z with a frequency equal to the

sum of the frequencies of X and Y ;

insert Z into H ;

make X and Y children of Z in T

What is its time complexity?

Huffman Encoding

Algorithm Huffman_Encoding (S, f);

insert all characters into a heap H

according to their frequencies;

while H not empty **do**

if H contains only one character X **then**

make X the root of T

else

delete X and Y with lowest frequencies;

from H ;

create Z with a frequency equal to the

sum of the frequencies of X and Y ;

insert Z into H ;

make X and Y children of Z in T

What is its time complexity? $O(n \log n)$

String Matching

Problem

Given two strings $A (= a_1a_2 \cdots a_n)$ and $B (= b_1b_2 \cdots b_m)$, find the first occurrence (if any) of B in A . In other words, find the smallest k such that, for all i , $1 \leq i \leq m$, we have $a_{k-1+i} = b_i$.

A (non-empty) *substring* of a string A is a consecutive sequence of characters $a_i a_{i+1} \cdots a_j$ ($i \leq j$) from A .

Straightforward String Matching


$A = \text{x y x x y x y x y y x y x y x y y x y x y x x}$. $B = \text{x y y x y x x}$.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
	x	y	x	x	y	x	y	x	y	y	x	y	x	y	x	y	y	x	y	x	y	x	x
1:	x	y	x	y	.	.	.																
2:		x	.	.	.																		
3:			x	y	.	.	.																
4:				x	y	x	y	y	.	.	.												
5:					x	.	.	.															
6:						x	y	x	y	y	x	y	x	y	x	x							
7:							x	.	.	.													
8:								x	y	x	.	.	.										
9:									x	.	.	.											
10:										x	.	.	.										
11:											x	y	x	y	y	.	.	.					
12:												x	.	.	.								
13:													x	y	x	y	y	x	y	x	y	x	x

Figure: An example of a straightforward string matching.

Source: redrawn from [Manber 1989, Figure 6.20].

Straightforward String Matching (cont.)

 What is the time complexity?

Straightforward String Matching (cont.)

🌐 What is the time complexity?

☀️ $B (= b_1 b_2 \cdots b_m)$ may be compared against

👁️ $a_1 a_2 \cdots a_m,$

👁️ $a_2 a_3 \cdots a_{m+1},$

👁️ $\dots,$ and

👁️ $a_{n-m+1} a_{n-m+2} \cdots a_n$

☀️ For example, $A = \text{xxxx} \dots \text{xxxy}$ and $B = \text{xxxy}.$

Straightforward String Matching (cont.)

- 🌐 What is the time complexity?
 - ☀️ $B (= b_1 b_2 \cdots b_m)$ may be compared against
 - 👁️ $a_1 a_2 \cdots a_m$,
 - 👁️ $a_2 a_3 \cdots a_{m+1}$,
 - 👁️ \dots , and
 - 👁️ $a_{n-m+1} a_{n-m+2} \cdots a_n$
 - ☀️ For example, $A = \text{xxxx} \dots \text{xxxy}$ and $B = \text{xxxy}$.
- 🌐 So, the time complexity is $O(m \times n)$.

Straightforward String Matching (cont.)

🌐 What is the time complexity?

☀️ $B (= b_1 b_2 \cdots b_m)$ may be compared against

👀 $a_1 a_2 \cdots a_m,$

👀 $a_2 a_3 \cdots a_{m+1},$

👀 $\dots,$ and

👀 $a_{n-m+1} a_{n-m+2} \cdots a_n$

☀️ For example, $A = \text{xxxx} \dots \text{xxxy}$ and $B = \text{xxxy}$.

🌐 So, the time complexity is $O(m \times n)$.

🌐 We will exam the cause of defficiency.

🌐 We then study an efficient algorithm, which is linear-time with a preprocessing stage.

Matching Against Itself

$$\begin{array}{cccccccccccc}
 B = & x & y & x & y & y & x & y & x & y & x & x \\
 & & x & \cdot & \cdot & \cdot & & & & & & \\
 & & & x & y & x & \cdot & \cdot & \cdot & & & \\
 & & & & x & \cdot & \cdot & \cdot & & & & \\
 & & & & & x & \cdot & \cdot & \cdot & & & \\
 & & & & & & x & y & x & y & y & \\
 & & & & & & & x & \cdot & \cdot & \cdot & \\
 & & & & & & & & x & y & x &
 \end{array}$$

Figure: Matching the pattern against itself.

Source: redrawn from [Manber 1989, Figure 6.21].

The Values of *next*

$i =$	1	2	3	4	5	6	7	8	9	10	11
$B =$	x	y	x	y	y	x	y	x	y	x	x
$next =$	-1	0	0	1	2	0	1	2	3	4	3

Figure: The values of *next*.

Source: redrawn from [Manber 1989, Figure 6.22].

The value of $next[j]$ tells the length of the longest proper prefix that is equal to a suffix of $b_1b_2 \dots b_{j-1}$.

$next[1]$ is set to -1 so that this unique case is easily differentiated (see the main loop of the KMP algorithm).

The KMP Algorithm

```
Algorithm String_Match ( $A, n, B, m$ );  
begin  
   $j := 1; i := 1;$   
   $Start := 0;$   
  while  $Start = 0$  and  $i \leq n$  do  
    if  $B[j] = A[i]$  then  
       $j := j + 1; i := i + 1$   
    else  
       $j := next[j] + 1;$   
      if  $j = 0$  then  
         $j := 1; i := i + 1;$   
      if  $j = m + 1$  then  $Start := i - m$   
end
```


The KMP Algorithm (cont.)

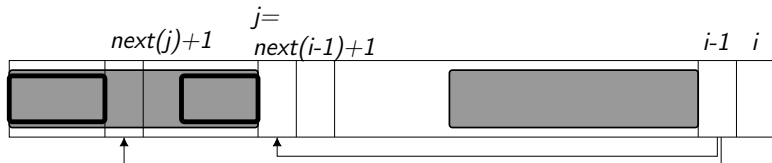


Figure: Computing $next(i)$.

Source: redrawn from [Manber 1989, Figure 6.24].

The KMP Algorithm (cont.)

```
Algorithm Compute_Next ( $B, m$ );  
begin  
   $next[1] := -1$ ;  $next[2] := 0$ ;  
  for  $i := 3$  to  $m$  do  
     $j := next[i - 1] + 1$ ;  
    while  $B[i - 1] \neq B[j]$  and  $j > 0$  do  
       $j := next[j] + 1$ ;  
     $next[i] := j$   
end
```


The KMP Algorithm (cont.)

🌐 What is its time complexity?

☀️ Because of backtracking, a_i may be compared against

👁️ b_j ,

👁️ b_{j-1} ,

👁️ ..., and

👁️ b_2

The KMP Algorithm (cont.)

- 🌐 What is its time complexity?
- ☀️ Because of backtracking, a_i may be compared against
 - 👁️ b_j ,
 - 👁️ b_{j-1} ,
 - 👁️ \dots , and
 - 👁️ b_2
 - ☀️ However, for these to happen, each of $a_{i-j+2}, a_{i-j+3}, \dots, a_{i-1}$ was compared against the corresponding character in $b_1 b_2 \dots b_{j-1}$ **just once**.

The KMP Algorithm (cont.)

- 🌐 What is its time complexity?
 - ☀️ Because of backtracking, a_i may be compared against
 - 👁️ b_j ,
 - 👁️ b_{j-1} ,
 - 👁️ \dots , and
 - 👁️ b_2
 - ☀️ However, for these to happen, each of $a_{i-j+2}, a_{i-j+3}, \dots, a_{i-1}$ was compared against the corresponding character in $b_1 b_2 \dots b_{j-1}$ **just once**.
 - ☀️ We may re-assign the costs of comparing a_i against $b_{j-1}, b_{j-2}, \dots, b_2$ to those of comparing $a_{i-j+2} a_{i-j+3} \dots a_{i-1}$ against $b_1 b_2 \dots b_{j-1}$.

The KMP Algorithm (cont.)

🌐 What is its time complexity?

☀️ Because of backtracking, a_i may be compared against

👁️ b_j ,

👁️ b_{j-1} ,

👁️ \dots , and

👁️ b_2

☀️ However, for these to happen, each of $a_{i-j+2}, a_{i-j+3}, \dots, a_{i-1}$ was compared against the corresponding character in $b_1 b_2 \dots b_{j-1}$ **just once**.

☀️ We may re-assign the costs of comparing a_i against $b_{j-1}, b_{j-2}, \dots, b_2$ to those of comparing $a_{i-j+2} a_{i-j+3} \dots a_{i-1}$ against $b_1 b_2 \dots b_{j-1}$.

🌐 Every a_i is incurred the cost of **at most two comparisons**.

🌐 So, the time complexity is $O(n)$.

Problem

Given two strings $A (= a_1a_2 \cdots a_n)$ and $B (= b_1b_2 \cdots b_m)$, find the minimum number of changes required to change A character by character such that it becomes equal to B .

Three types of changes (or edit steps) allowed: (1) **insert**, (2) **delete**, and (3) **replace**.

String Editing (cont.)

Let $C(i, j)$ denote the minimum cost of changing $A(i)$ to $B(j)$, where $A(i) = a_1 a_2 \cdots a_i$ and $B(j) = b_1 b_2 \cdots b_j$.

$$C(i, j) = \min \begin{cases} C(i-1, j) + 1 & (\text{deleting } a_i) \\ C(i, j-1) + 1 & (\text{inserting } b_j) \\ C(i-1, j-1) + 1 & (a_i \rightarrow b_j) \\ C(i-1, j-1) & (a_i = b_j) \end{cases}$$

String Editing (cont.)

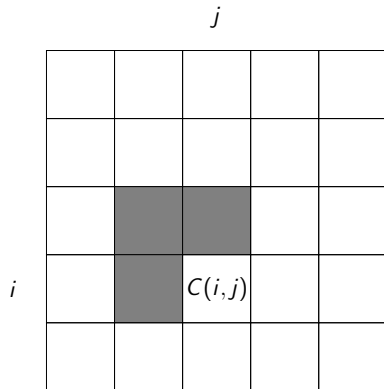


Figure: The dependencies of $C(i, j)$.

Source: redrawn from [Manber 1989, Figure 6.26].

String Editing (cont.)

Algorithm Minimum_Edit_Distance (A, n, B, m);

```
for  $i := 0$  to  $n$  do  $C[i, 0] := i$ ;  
for  $j := 1$  to  $m$  do  $C[0, j] := j$ ;  
for  $i := 1$  to  $n$  do  
  for  $j := 1$  to  $m$  do  
     $x := C[i - 1, j] + 1$ ;  
     $y := C[i, j - 1] + 1$ ;  
    if  $a_i = b_j$  then  
       $z := C[i - 1, j - 1]$   
    else  
       $z := C[i - 1, j - 1] + 1$ ;  
     $C[i, j] := \min(x, y, z)$ 
```

String Editing (cont.)

Algorithm Minimum_Edit_Distance (A, n, B, m);

```
for  $i := 0$  to  $n$  do  $C[i, 0] := i$ ;  
for  $j := 1$  to  $m$  do  $C[0, j] := j$ ;  
for  $i := 1$  to  $n$  do  
  for  $j := 1$  to  $m$  do  
     $x := C[i - 1, j] + 1$ ;  
     $y := C[i, j - 1] + 1$ ;  
    if  $a_i = b_j$  then  
       $z := C[i - 1, j - 1]$   
    else  
       $z := C[i - 1, j - 1] + 1$ ;  
     $C[i, j] := \min(x, y, z)$ 
```

Its time complexity is clearly $O(mn)$.